


The SPOT™ Xplorer Monochrome digital camera offers deep cooling and high speed, optimizing sensitivity for low light scientific applications. 14-bit digitization with multiple readout speeds add flexibility for recording dynamic events. Its CCD sensor provides megapixel resolution and high quantum efficiency, especially in the near-IR portion of the spectrum. The primary applications for this camera include live cell GFP imaging, ion tracking, high content screening, immunofluorescence and 3D deconvolution.

The SPOT Xplorer includes SPOT Basic software (Windows® and Mac® OS) for real-time image preview and acquisition, and drivers are available for many third-party imaging software applications. Advanced triggering enables precise synchronization with peripherals. The SPOT Xplorer camera's robust design and well-documented, free Software Development Kit (SDK) provide easy OEM integration.



Xplorer™ 1.4 Mp MONOCHROME

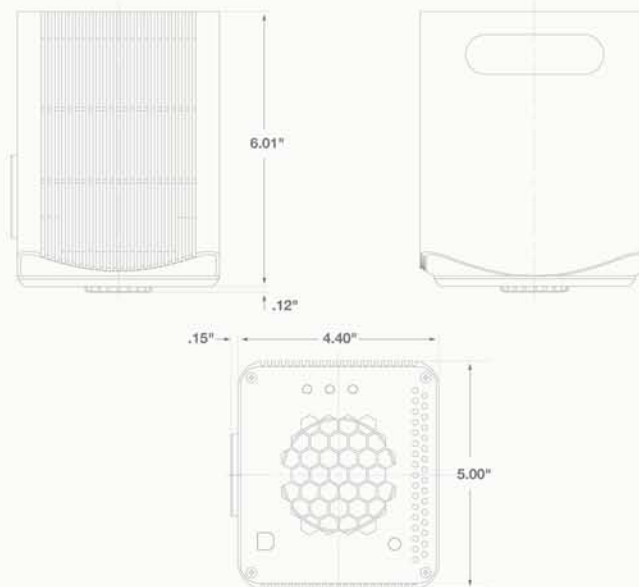

Features


Benefits

Nearly 11 full frames per second	High speed image capture
-40° C regulated cooling	Dark noise reduction and repeatable dark frame correction for long exposures
Enhanced IR Mode	Increases the Sensitivity for wavelengths > 525 nm (see QE chart)
No Glow Mode	Turns off all sources of On-CCD circuit glow during exposure. Important for long exposure
4.5 e ⁻ Read Noise	Great lowlight detection limit and SNR
14-bit digitization	Over-sampled bit depth ensures best data quality
Interline progressive scan CCD	Electronic shuttering eliminates mechanical shutter shortcomings related to speed, wear, and vibration



Specifications	
Resolution	1.4 Mp
Sensor Type	Sony ICX285AL with cover glass Monochrome Progressive scan interline CCD Shutter
Active Pixels	1360 x 1024
Pixel Size	6.45 µm x 6.45 µm
Optical Format	2/3"
Active Imager Size	8.77mm (H) x 6.60mm (V)
Exposure Time	0.5 ms – 1500 sec
Anti-Blooming	100x minimum
Binning	2 x 2, 3 x 3, 4 x 4, 8 x 8
Region of Interest:	User selectable
Read Noise	4.5 e ⁻ @ 10 MHz; 5.5 e ⁻ @ 20 MHz
Dark current	0.0013 e/p/s
Full Well Depth	>16,000 e ⁻ (no binning) >24,600 e ⁻ (with binning)
Non-linearity	<1%
A-D Converter	14-Bit @ 10/20 MHz DCS
Saving Bit Depth	8, 12 or 16 bits/channel (Monochrome)
Cooling	Peltier thermoelectric cooling, -40°C regulated, -70° C maximum differential cooling from ambient
Lens Mount	C-Mount with adjustable back focus
Computer Interface	PCI Express
Triggers	Camera ready (TTL) External trigger input (TTL) Exposure sync output (TTL)
Tripod Mount	1/4"-20 UNC
Weight	4.5 lbs (2.1kg)
Size	5.00" W x 4.40"D x 7.13"H (127mm x 112mm x 181mm)
Power Requirements	100-240 VAC 1A
Operating Environment	0 to 30°C ambient, 0- 80% relative humidity (non-condensing)
Storage Temperature	-20 to 60°C
Certifications	CE, FCC Class A, EN60950, RoHS

Quantum Efficiency

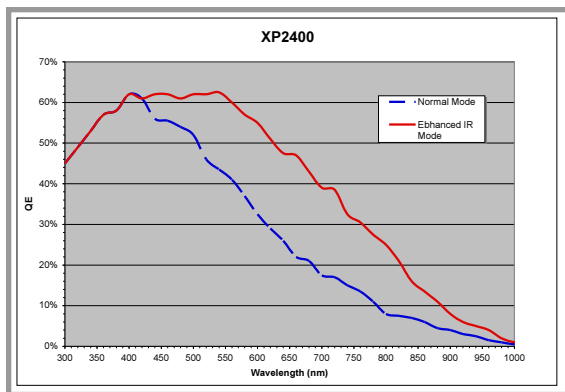

Captured Frame Rates Captured Frames per Second *

Binning level	Region of interest				
	1360x1024	640x480	512x512	256x256	50x50
None	10.8	21.1	20.1	35.0	92.4
2 x 2	19.7	37.1	34.8	58.2	114.0
3 x 3	27.4	48.4	46.3	74.4	124.6
4 x 4	33.8	59.2	57.4	84.6	130.0
8 x 8	55.3	83.6	83.2	108.7	138.8

*1ms exposure with post-processing deferred, taken with 2.6 Ghz Xeon processor running Windows XP. Capture rates on other computers OS platforms may vary.

Spot Software	
Spot Basic Software Features	<ul style="list-style-type: none"> Color Live mode viewing window with controls Image capture window Image capture setups are user defined, named and saved Auto or manual exposure for Live and captured images Zoom control on Live and captured images Auto white balance Spot or average metering Flatfield correction Annotation Calibration mark Measurement tools Image enhancement tools Sequential image capture and playback Report generator Interactive print dialog Help menu Drivers: Twain for Windows®, 3rd Party Interface for Mac®
Computer Operating System Compatibility	Mac®: OS X Windows®: XP, Vista®, 7 (32 bit versions only)
Minimum Computer	Mac®: 400MHz Power PC, 512MB RAM, FireWire® IEEE 1394a port PC: 1GHz Pentium, 512MB RAM, FireWire® IEEE 1394a port Mac® and PC video: 24-bit color @ 1024 x 768 resolution
Spot Advanced Software	Available (includes macro feature, floating taskbars and image archiving database)
Spot Advanced Software Modules (Optional)	Available (adds image display intensity scaling, peripheral device control and extended depth of focus)
Software Development Kit	Available for Mac® and Windows®
Native Drivers for 3rd Party Software	Available (call or visit our website)

Items Included	
Camera Head	With lens cap
PCI Express card	Computer interface
Communication cable	Data cable
Power supply with Power Cable	With power cord, 3.61" (92mm) x 3.90" (99mm) x 8.13" (207mm), 3.2 lbs. (1.5kg)
Quick Start Installation Guide	Instructions on how to get up and running quickly
Software CD	Includes Spot Basic software and User Guide
Warranty	2 years from date of purchase

Catalog number	C-Mount	F-Mount
Xplorer 1.4 Mp Mono	N/A	XP2400

Mac® is a registered trademark of Apple Inc.
Windows® is a registered trademark of Microsoft.
Specifications are typical and subject to change.

