

SPOT RT, SPOT RT Monochrome, SPOT RT Slider

Camera models:

RT Monochrome- Fixed monochromatic mode (no color capability).

RT Color- Fixed color filter with clear mode.

RT Slider- Slide mounted color filter for selection of color or monochrome mode.

CCD Information:

Kodak KAI - 2092, with protective cover glass removed.

Optical resolution:

1520 x 1080, 7.4 μ m square pixels
1,641,600 pixels per color plane
4,924,800 pixels measured per RGB Image

Imaging Area:

11.1mm X 7.9 mm

Digitization:

Pixel by Pixel digitization in camera head at CCD chip

Bit depth:

24 or 36 bit color,
8 or 12 bit monochrome

Binning Modes:

2x2, 3x3, 4x4

File sizes:

8 bit monochrome = 1.64 MB
12 bit monochrome = 2.46 MB
24 bit RGB color = 4.92 MB
36 bit RGB color = 7.38 MB

Pixel Readout Rate:

Image capture: 6 MHz / 12bit
Live image: 36 MHz, (Dual channel
18MHz / 8 bit)

Image Capture Time:

RGB: ~6.5 sec.
Monochrome: ~1.5 sec.
(Brightfield image and
PII 400Mhz)

Live Image Frame Rates:

(computer, video card and image brightness dependent)

Monochrome, 1520 x 1080 resolution:
8.5 frames/sec.

Monochrome, 760 x 540 resolution:
19 frames/sec.

Color, 380 x 270 resolution:
12 frames / sec.

CCD Cooling:

37° C differential from room temperature
(-12° C @ 25° C room temperature.)

Temperature stability:

$\pm 1^\circ$ C per 8-hr. period

Dark current:

0.15 e/p/s @ -12°C (typical)

Full Scale Charge:

40,000 e (nominal); 35,000 e (minimum)

Signal to noise ratio:

60 dB

Dynamic range:

60 dB

Anti-blooming factor:

300 times (nominal); 100 times
(minimum)

Exposure:

Automatic or manual,
1ms-536s per color.

Lens mount:

(Optical couplers available for almost all microscopes).

RT Monochrome: C Mount

RT Color: Nikon "F" Mount

RT Slider: Nikon "F" Mount

Camera Window:

RT Monochrome: UBK7 glass with
320-900nm AR coating

RT Color: BK7 glass with 430-690nm
AR coating

RT Slider: UBK7 glass with 320-900nm
AR coating

Computer interface card supplied:

PCI Bus Card

External shutter control:

BNC, TTL level output for shuttering
fluorescence illuminators.

Power requirements:

Voltage configurable to 100V, 120V, 220V
or 240V 50/60 Hz

Mechanical Specifications:

Camera Head: 127 mm x 127 mm x
132 mm, 1400g
Power supply: 127 mm x 140mm x
330 mm, 5500g

Certifications: CE, FCC Class A

Computer Requirements:

PC: Pentium 166 or greater,
Windows 95/98/NT

Mac: Power PC with PCI Bus, MacOS 7.6
or greater.

RAM: 64 MB (minimum), 256 MB
(recommended).

Video card: Support of 24 bit RGB at
desired monitor resolution.

Software Features:

Basic Mode & Advanced Mode.

Live image window, image capture
window, auto exposure, auto white
balance, image setups, sequential
imaging, zoom, pan window.

24/36 bit color or 8/12bit monochrome
image editing: undo last, resize, rotate,
flip, and crop. Adjust in RGB, HSL or
HSV for hue, saturation, brightness,
contrast, gamma, histogram, and auto
bright-dark stretch.

Sharpen, smooth, unsharp mask, noise
filter, match color, convert to gray scale,
make negative, combine images, change
bit depth, merge images, flat field adjust,
dark frame subtract.

Annotate with text, graphics and
calibration mark. Measure length,
perimeter, area, and angle.
Attach memos.

Database,¹ report generation,¹
multiple-image layout print dialog.
(¹-Not currently available for MacOS)

File formats supported:

TIFF, TIFF-JPEG, TIFF-Packed,
JPEG, BMP, PICT.

Drivers:

Twain for Windows 95,98, NT, and
MacOS included.

Native drivers available ²- for Axiovision,
C- Imaging, image Pro Plus, IP-Labs,
Metamorph, Northern Eclipse, Optimas.
(²- 4th Quarter 1999)

DIAGNOSTIC
instruments, inc.

6540 Burroughs

Sterling Heights, Michigan USA



48314-2133

Phone: 810.731.6000

Fax: 810.731.6469

E-mail: info@diaginc.com

Website: www.diaginc.com

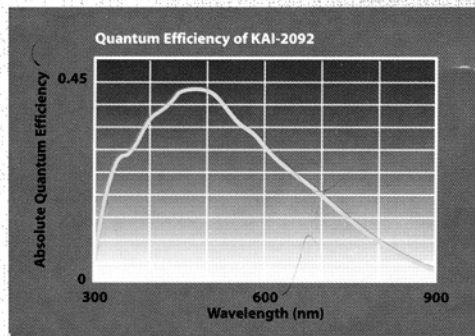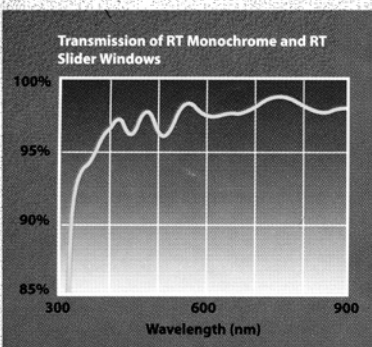

Because of the three-shot technique, the SPOT camera should not be used for color image captures of moving specimens. Monochrome images are unaffected.